


Discover SANDPIPER® Pumping Solutions

A WARREN RUPP PUMP BRAND

- Sealless
- Self-Priming
- Infinitely Variable Flow
- Deadheads No Bypass Needed
- Groundable
- Available with BSP (Tapered) or PN 10 DIN Flange Connections
- Handles Abrasives and Corrosives
- Moves Heavy Viscosities
- Runs Dry Without Damage
- No Meters
- Gentle to Shear Sensitive Materials

SANDPIPER® Pumps

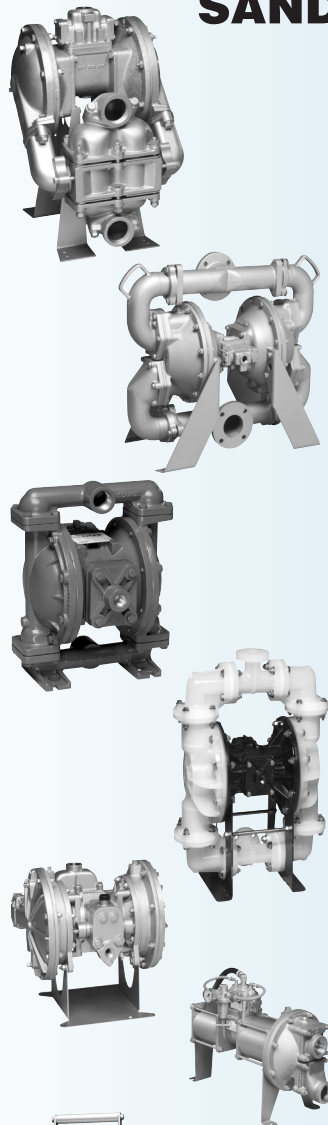

		Pump Materials											Elastomers							
		CP	PP	K	NY	CA	AL	CI	SS	HC	CV	N	B	E	**V	T	H	S	PU	
HEAVY DUTY BALL VALVE																				
SB1	0 to 42 gpm	*					Ex		Ex	Ex		■	■	■	■	■	■	■	■	
HDB1½	0 to 90 gpm	*					Ex	Ex	Ex	Ex		■	■	■	■	■	■	■	■	
HDB2	0 to 135 gpm	*					Ex	Ex	Ex	Ex		■	■	■	■	■	■	■	■	
HDB3	0 to 260 gpm	*						Ex	Ex			■	■	■	■	■	■	■	■	
HDB4	0 to 260 gpm	*						Ex				■	■	■	■	■	■	■	■	
HEAVY DUTY FLAP VALVE																				
SA1	0 to 42 gpm	*					Ex		Ex			■	■	■	■	■	■	■	■	
HDF2	0 to 140 gpm	*					Ex	Ex	Ex			■	■	■	■	■	■	■	■	
HDF3	0 to 260 gpm	*					Ex	Ex				■	■	■	■	■	■	■	■	
HDF4	0 to 260 gpm	*					Ex	Ex				■	■	■	■	■	■	■	■	
STANDARD DUTY METALLIC																				
E02	0 to 4.4 gpm	*							Ex							■	■	■	■	
S05	0 to 15 gpm	*					Ex		Ex	Ex		■	■	■	■	■	■	■	■	
S1F	0 to 45 gpm	*					Ex	Ex	Ex	Ex		■	■	■	■	■	■	■	■	
S15	0 to 106 gpm	*					Ex	Ex	Ex	Ex		■	■	■	■	■	■	■	■	
S20	0 to 150 gpm	*					Ex	Ex	Ex	Ex		■	■	■	■	■	■	■	■	
S30	0 to 235 gpm	*					Ex	Ex	Ex	Ex		■	■	■	■	■	■	■	■	
STANDARD DUTY NON-METALLIC																				
PB¼	0 to 4 gpm	*	■	■	■	Ex										■	■	■	■	
S05	0 to 14 gpm	*	Ex	■	■	■	Ex				Ex	■	■	■	■	■	■	■	■	
S07	0 to 23 gpm			■	■	■						■	■	■	■	■	■	■	■	
S10	0 to 23 gpm			■	■	■						■	■	■	■	■	■	■	■	
S1F	0 to 45 gpm	*	Ex	■	■	■					Ex	■	■	■	■	■	■	■	■	
S15	0 to 100 gpm		Ex	■	■	■										■	■	■	■	
S20	0 to 160 gpm		Ex	■	■	■										■	■	■	■	
S30	0 to 238 gpm			■	■	■										■	■	■	■	
CONTAINMENT DUTY METALLIC																				
ST1-A	0 to 42 gpm	*					Ex		Ex	Ex						■	■	■	■	
ST1½-A	0 to 90 gpm	*					Ex	Ex	Ex	Ex						■	■	■	■	
HIGH PRESSURE 2:1																				
EH2 Ball Valve	0 to 62 gpm	*						Ex	Ex			■	■	■	■	■	■	■	■	
SH2 Flap Valve	0 to 62 gpm	*					Ex	Ex				■	■	■	■	■	■	■	■	

CP= Conductive Polypropylene CV= Conductive PVDF SS= Stainless Steel E= EPDM S= Santoprene®
 PP= Polypropylene CA= Conductive Acetal HC= Alloy C V= FKM** PU= Polyurethane
 K= PVDF AL= Aluminum N= Neoprene T= Virgin PTFE **Fluorocarbon
 NY= Nylon CI= Cast Iron B= Buna H= Hytrel® Elastomers



SludgeMaster™
 Submersible air-powered pump. Rugged, portable trash pump handles mud, twigs, sand, sludge. Solids to 1½", weighs only 49 lbs., fits through a 14" opening. Flows to 300 gpm.



PortaPump®
 Submersible battery-powered pump. Operates via cables and battery clips from any 12-volt truck or car battery. Weighs only 33 lbs., fits through a 10" opening. Flows to 43 gpm.

*ATEX 100a Compliant  I M2 c T5
 II 2GD T5

WARREN RUPP®
 A Unit of IDEX Corporation
 800 N Main Street • P.O. Box 1568
 Mansfield, OH 44901-1568 USA
 419-524-8388 Fax 419-522-7867

Visit us at our website
www.warrenrupp.com